

Figure 1
(Prior Art)

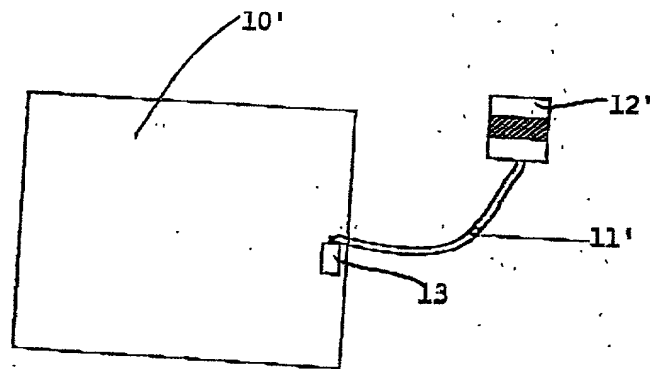


Figure 2

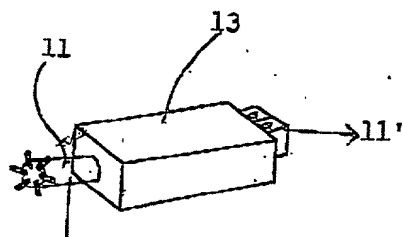


Figure 3




Figure 2A




Figure 4

NOTES: 1. ALL COMPONENTS ARE TO BE USED AT ROOM TEMPERATURE. 2. THE CIRCUIT IS DESIGNED TO OPERATE AT 12°C. 3. THE CIRCUIT IS DESIGNED TO OPERATE AT 12°C. 4. THE CIRCUIT IS DESIGNED TO OPERATE AT 12°C.

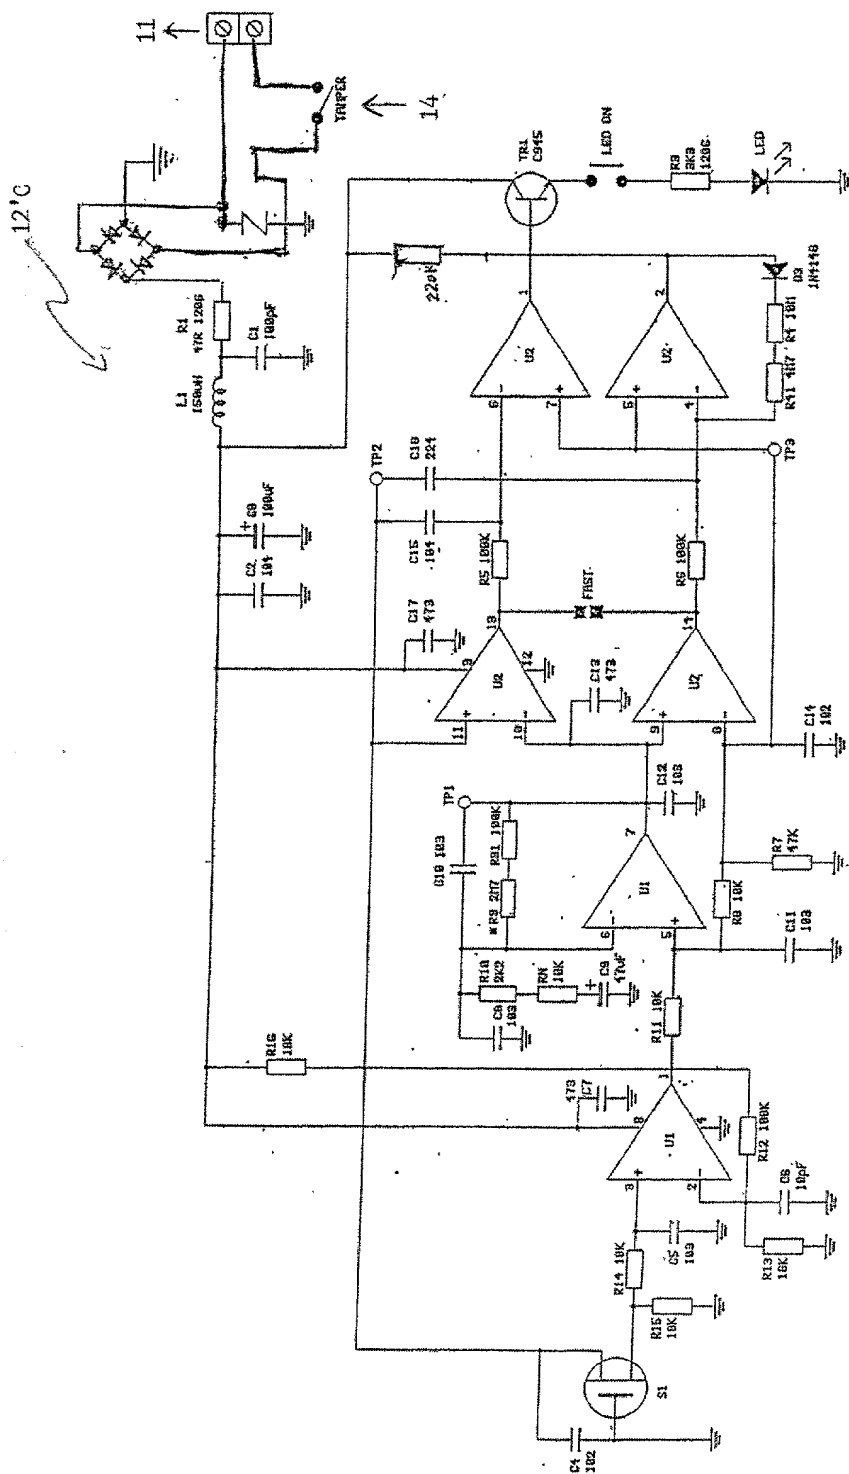


Figure 5

Current Consumption level at Part 1 to the
TWO-WIRE PIR part 1 (mA)

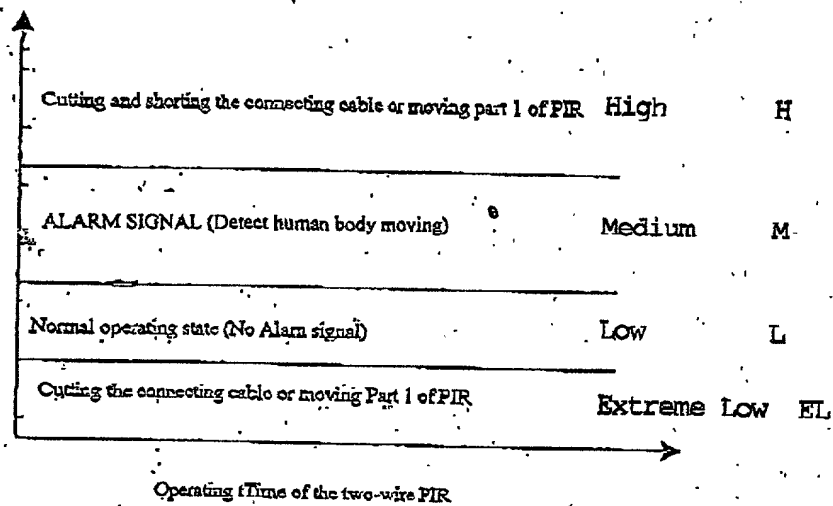


Figure 6